
Safe & Sound Pan & Tilt Video **Baby Monitor VM343**







What's in the box






Install the battery


You can power up the parent unit by connecting it to AC power or to the rechargeable battery provided. Even if the parent unit is connected to AC power, we recommend you also install the battery. This guarantees continual operation in case of a power outage.

Install the battery as shown below.


1. Press down on the large tab of the battery compartment cover and pull it out.



With the label THIS SIDE UP facing up, insert the small tabs of the battery into the slots inside the battery compartment. Make sure the metallic contact is correctly oriented as shown below. Push the battery into the battery compartment until it clicks securely into place.



 Align the battery compartment cover flat against the battery compartment, then slide it towards the centre of the parent unit until it clicks into place.



Replace the battery

To replace the battery, press down on the large tab of the battery compartment cover and pull it out, then follow the steps above to install the

14 °C

- The operating time for using the rechargeable battery is short. If you want to monitor your baby for a long time, we recommend you connect the parent unit to AC power
- If the parent unit will not be used for a long time,

Displays when the temperature

Displays the real-time temperature


Displays when the speaker volume

Connect and charge the attery

ØNOTES

- Use only the battery supplied with this product.
- Use only the power adaptors supplied with this product.
- Make sure the wall socket is switched on.
- The power adaptors are intended to be correctly oriented in a vertical or floor mount position. The prongs are not designed to hold the plug in place if they are plugged into a ceiling, under-the-table or
- Make sure the parent unit, the baby unit and the power adaptor cord are out of reach of children.

Connect the baby monitor

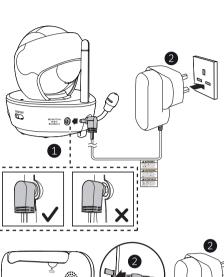

Charge the parent unit battery

When you have connected the parent unit and installed its battery for the first time or after power outage, the parent unit powers on automatically. The battery icon indicates the battery status (see the following table).

- The parent unit battery is fully charged after
- 3 hours of continuous charging It takes longer to charge the battery when the parent unit is turned on. To shorten the charging time, turn the parent unit off whilst charging.
- The standby time varies depending on the sensitivity level you set, your actual use and the age of the battery.

Battery Battery Action


indicators	status	Action
The battery icon is off and to displays.	No battery is installed but operates using AC power, or the battery has been installed incorrectly.	Install the parent unit battery. Charge witho interruption (at least 30 minutes).
The screen displays Battery low at Parent Unit and The light flashes.	The battery has very little charge and may be used for only a short time.	Charge witho interruption (about 30 minutes).
The battery icon becomes solid IIII.	The battery is fully charged.	To keep the battery charged, connect it to AC power when not in use.

Before use

Test the baby monitor before initial use, and at regular times thereafter.

To test your baby monitor:

- 1. Place the parent unit and the baby unit in the same room to test the product. Make sure the baby unit is at least 1 metre / 3 feet away from the parent unit.
- 2. Slide **ON/OFF** on the baby unit to turn it on.



3. Upon initial use, the parent unit powers on automatically after connecting to AC power The screen shows **vtech**° and **Powering**



If both units are not connected, the parent unit displays No link to CAM 1 and Linking... on the screen. The LINK light first flashes and then turns off. Move the parent unit closer to the baby unit.

Positioning the baby monitor

This baby monitor is intended as an aid. It is not a substitute for proper adult supervision and should not be used as such.


DCAUTION

Keep the baby unit out of the reach of your baby. Never place or mount the baby unit inside the baby's cot or playpen

1. Place the baby unit at least 1 metre / 3 feet away from your baby.



2. Place parent unit at least 1 metre / 3 feet away from the baby unit.

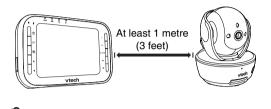

If you experience audio feedback on either the parent unit or baby unit, move the parent unit further away until there is no more audio feedback.


You can increase the speaker volume of the parent

unit if you cannot hear the sounds transmitted from the baby unit.

Operating range


The operating range of the baby monitor is up to 300 metres (1,000 feet) outdoors or 50 metres (160 feet) indoors. The actual operating range may vary depending on the environmental conditions and other interferences such as walls, doors and other obstructions.

Overview

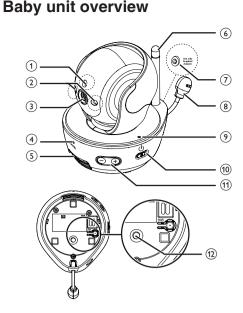

ned on nit. s pairing
or off.
olume.
se.

Parent unit overview

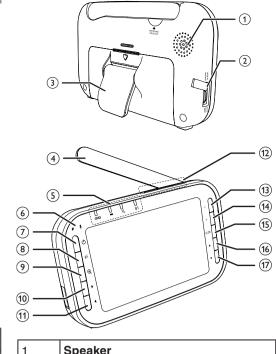

1	Speaker
2	Power jack
3	Stand
4	Antenna
5	LED lights
	 Indicate the different statuses of the parent unit. For details, refer to Parent unit lights.
6	Microphone
7	ம் On/off
	Press to power on.
	• Press and hold to power off.
8	TALK
	 Whilst viewing an image, press and hold to talk to the baby unit.
9	⊕ Zoom
	Whilst viewing an image, press to zoom in or out.

Whilst in a menu, press to select a Whilst viewing an image,

- press and hold to move the image to the right.
- Whilst in a menu, press to return to the main menu or idle screen. Whilst viewing an image, press and hold to move the image to the left.
- Press and hold to turn the parent unit screen off.
 - Press to skip to the next lullaby.
- Press to play or stop the lullaby
- +/VOL Press to increase the speaker volume. -/VOL
- Press to decrease the speaker volume. MENU/SELECT
 - Press to enter the menu. Whilst in a menu, press to choose an item or save a setting.
- Whilst in a menu, press to scroll up. Whilst viewing an image, press and hold to move the image
- upwards.
- Whilst in a menu, press to scroll Whilst viewing an image,
- press and hold to move the image downwards.

LINK	On when moderate or high signal strength is detected between the parent unit and the baby unit.
	Flashes when low signal strength is detected between the parent unit and the baby unit.
	Off when the parent unit is turned off, or the link to the baby unit is lost.

- On when the parent unit is connected to AC power, or the battery is charging. Flashes when the parent unit battery is
- **TALK** On when the parent unit is talking to the baby unit.
- On when the speaker volume of the parent unit is turned off.

Till

strength is detected between the baby unit and the parent unit.

- T displays when the link between
- the baby unit and the parent unit is lost.
- - PATROL mode.
- - Displays when the camera at the baby unit has zoomed in.

- low and needs charging Off when the parent unit is disconnected from AC power.

Parent unit display icons

• Till displays when strong signal

- Displays when the parent unit is in
 - Night viewing

ent unit lights		
(On when moderate or high signal strength is detected between the parent unit and the baby unit.	
	Flashes when low signal strength is detected between the parent unit and the baby unit.	

Connection status

- or Ti displays when moderate or low signal strength is detected between the baby unit and the parent unit.
- Patrol mode
- - Displays when the camera has activated the night viewing feature.

Parent unit lighte

ent unit ngrits		
(On when moderate or high signal strength is detected between the parent unit and the baby unit.	
	Flashes when low signal strength is detected between the parent unit and the baby unit.	
	Off when the parent unit is turned off,	

is fully charged. low and needs charging.

the battery.

AC power

Displays the sound level according to the scales of loudness when there is sound transmitted from the baby unit. Speaker volume

Sound level indicators

alert is set on

Real-time temperature

of the baby unit.

is set to off.

- Displays the speaker volume level whilst adjusting. **Battery status** > III > IIII > IIII | animates
- when the battery is charging. displays solid when the battery ightharpoonup displays when the battery is

Displays when the parent unit is

connected to AC power without

Vibration You can turn the vibration alert on so that the parent unit vibrates when

- and the baby unit is lost; temperature range.
- - You can change the brightness of the parent unit screen.

Parent unit main menu icons

Alert tone You can set the parent unit to beep

the parent unit battery is low; the link between the parent unit and the baby unit is lost.



exceed a certain level. You can



the parent unit.

You can turn the temperature alert feature on so that the parent unit beeps whenever the room temperature detected by the baby unit falls out of the desired temperature range.



- the temperature detected by the baby unit falls out of the preset Sound-activated screen


- Sensitivity

With this feature, you can choose to hear sounds from the baby unit all the time, or to hear sounds that use the parent unit to adjust the microphone sensitivity of your baby unit. The higher the sensitivity level, the more sensitive the baby unit is in

Temperature

detecting sounds for transmitting to

the link between the parent unit



Brightness

You can choose a specific name for the baby unit from a pre-defined name list.



Pair/unpair The baby unit and parent unit

provided are already paired.

Parent unit display messages

	No link to CAM 1.	The baby unit is out of range or is turned off.
	Battery low at Parent Unit	The battery level of the parent unit is very low and needs to be recharged.
	Battery empty. Powering off	The battery is empty an needs to be recharged.
	Temperature too low at CAM 1.	The temperature detect from the baby unit is below the selected minimum temperature.
	Temperature too high at CAM 1.	The temperature detector from the baby unit is above the selected

Powering on...

Linking...

maximum temperature.

The parent unit is

when the link is lost.

searching for baby unit

The parent unit is turning

Power the baby unit on or off • Slide **ON/OFF** to the left to turn the baby unit

Using the baby monitor

on. The **ON/OFF** LED light turns on. Slide **ON/OFF** to the right to turn the baby unit off. The **ON/OFF** LED light turns off.

• Press \odot to turn the parent unit on. The **LINK** light turns on.

Power the parent unit on or off

Turn the parent unit screen on or

without powering off the parent unit. You can still hear sound from the baby unit. Press and hold **VIEW** on the parent unit to

Press any key on the parent unit to turn the

Press VOL+ or VOL- on the parent unit at

When the parent unit speaker volume is set to zero,

appears on the screen and the 💢 light turns on.

Adjust speaker volume

turn the screen off.

any time when viewing images. $\boldsymbol{\mathscr{G}}$ NOTE

For parent unit:

For baby unit: • Press **VOL+** or **VOL-** on the baby unit at any time.

Adjust screen brightness

unit screen from Level 1 to Level 5.

- your selection.

unit from **Level 1** to **Level 5**. The higher the You can turn the parent unit screen on or off

You can change the brightness of the parent

Level 4

Level 2

Level 1

- 3. Press ▼ or ▲ to choose the desired level of brightness, then press **SELECT** to confirm

Press and hold $oldsymbol{\Phi}$ again to turn the parent the baby unit unit off. The **LINK** light turns off.

Level 3.

unit all the time, or to hear sounds that exceed a certain level. You can use the parent unit to adjust the microphone sensitivity of your baby sensitivity level, the more sensitive the baby

Sensitivity

- Level 5 High sensitivity 1. Press **MENU** when the parent unit is not in
- 2. Press ▼ or ▲ to choose **BRIGHTNESS**, then press **SELECT**.

Adjust the sound sensitivity of

You can choose to hear sounds from the baby unit is in detecting sounds for transmitting to the parent unit. The sound sensitivity is preset to

High sensitivity level The parent unit speaker is

hear all sounds (including background noises) from your baby's room. Medium high

turns on for soft babbling

and louder sounds from you

baby. It remains quiet when

your baby sleeps soundly.

Medium sensitivity level

The parent unit speaker

turns on for loud babbling

your baby. It remains quie

The parent unit speaker

sounds from your baby. It

remains quiet when your

baby makes soft sounds.

The parent unit speaker

turns on for loud crying or

screeching sounds from

your baby. It remains quiet

when your baby makes soft

Low sensitivity level

turns on for crying and loude

when your baby makes soft

and louder sounds from

sounds.

sounds.

1. Press **MENU** when the parent unit is not in

Medium low

sensitivity level

sensitivity level The parent unit speaker

automatically turns on.

2. Press ▼ or ▲ to choose

3. Press ▼ or ▲ to choose **On** or **Off**, then press **SELECT** to confirm your selection.

- If you mute the speaker whilst sound activation
- continuously whilst the sound activation is on, then

from the baby unit.

Press ⊕ to zoom in. zoomed image upwards, downwards,

2. Press ▼ or ▲ to choose **SENSITIVITY**, then

Talk

sensitivity level, then press **SELECT** to

You can adjust the baby unit placement to improve the sound detection.

3. Press ▼ or ▲ to choose the desired

sensitivity

press SELECT.

confirm your selection.

The parent unit continuously monitors the sound level in your baby's room. When the sound

As long as no sound is detected within 50 seconds, the parent unit screen is off to save power. When your baby starts to cry, the sound activation triggers the parent unit screen

Turn the sound activation on or

1. Press **MENU** when the parent unit is not in

- SOUND-ACTIVATED SCREEN, then press SELECT.
- is on, then you hear a beep sound whenever the screen turns on If you want to turn the parent unit screen on

You can zoom in or out whilst viewing an image

 Press and hold ▲, ▼, ◀ or ▶ to move the leftwards or rightwards correspondingly.

Press ⊕ again to zoom out.

You can use the **TALK** function of the parent unit to comfort your baby. 1. Press and hold TALK on the parent unit. The

TALK light turns on. 2. Speak towards the microphone on the parent unit. Your voice is broadcast to the baby unit.

3. Release the **TALK** key to stop the broadcast. The TALK light goes off.

Sound sensitivity table for reference Description

constantly on, and you wil activation mode is on, the parent unit screen turns on when the baby unit detects a sound.

Set alert tone

Low battery tone

You can set the parent unit to beep when the parent unit operates in low battery condition.

- 1. Press **MENU** when the parent unit is not in
- 2. Press ▼ or ▲ to choose **ALERT TONE**, then press **SELECT**
- 3. Press ▼ or ▲ choose Low Battery Tone, then press **SELECT**
- 4. Press ▼ or ▲ to choose **On** or **Off**, then press **SELECT** to confirm your selection.

You can set the parent unit to beeps when the link between the parent unit and the baby unit is

- 1. Press **MENU** when the parent unit is not in
- 2. Press ▼ or ▲ to choose ALERT TONE, then press SELECT.
- 3. Press ▼ or ▲ to choose No Link Alert, then press **SELECT**
- 4. Press ▼ or ▲ to choose **On** or **Off**, then press **SELECT** to confirm your selection.

Sound alert

You can turn the sound alert feature on so that, whilst in **SPLIT-VIEW** mode, the parent unit beeps whenever the baby unit detects sounds. 1. Press **MENU** when the parent unit is not in

2. Press ▼ or ▲ to choose ALERT TONE, then

press **SELECT** to select.

- 3. Press ▼ or ▲ to choose Sound Alert, then press **SELECT**.
- 4. Press ▼ or ▲ to choose **On** or **Off**, then press **SELECT** to confirm your selection.

Monitor the temperature

To monitor the temperature of your baby's room, you can turn the parent unit temperature alert feature on. It beeps whenever the temperature detected by the baby unit falls out of the desired temperature range.

Minimum temperature

You can set the desired minimum room temperature of the room temperature alert range. The minimum temperature can be set between 11 °C (52 °F) and 20 °C (69 °F).

- 1. Press **MENU** when the parent unit is not in **SELECT** to confirm your selection.
- 2. Press ▼ or ▲ to choose TEMPERATURE, then press SELECT.
- 3. Press ▼ or ▲ to choose Minimum, then press SELECT.
- 4. Press ▼ or ▲ to choose the desired temperature, then press **SELECT** to confirm vour selection.

Maximum temperature

vour selection

You can set the desired maximum room temperature of the temperature alert range. The maximum temperature can be set between 21 °C (70 °F) and 30 °C (86 °F).

- 1. Press **MENU** when the parent unit is not in
- 2. Press ▼ or ▲ to choose TEMPERATURE, then press **SELECT**.
- 3. Press ▼ or ▲ to choose **Maximum**, then press SELECT. 4. Press ▼ or ▲ to choose the desired

temperature, then press **SELECT** to confirm

You can set the parent unit to beep when the temperature is out of the preset temperature

- 1. Press **MENU** when the parent unit is not in
- 2. Press ▼ or ▲ to choose TEMPERATURE, then press **SELECT**.
- 3. Press ▼ or ▲ to choose Alert, then press
- 4. Press **▼** or **△** to choose **On** or **Off**, then press

Temperature format

SELECT.

Temperature alert

You can choose to display the temperature in

- Celcius (°C) or Fahrenheit (°F). 1. Press **MENU** when the parent unit is not in
- Press ▼ or ▲ to choose TEMPERATURE,
- then press SELECT. 3. Press **▼** or **△** to choose **Format**, then press
- 4. Press ▼ or ▲ to choose Fahrenheit or Celsius, then press SELECT to confirm your selection.

Vibration You can turn the vibration feature on so that the parent unit vibrates when

- the link between the parent unit and the baby unit is lost:
- the temperature detected by the baby unit falls out of the preset temperature range.
- 1. Press **MENU** when the parent unit is not in
- 2. Press ▼ or ▲ to choose VIBRATION, then press SELECT.
- press **SELECT**. Press ▼ or ▲ to choose On if speaker is off, Alwavs on or Off
- On if speaker is off The parent unit vibrates only when the speaker of the parent unit is turned off.
- Always on The parent unit vibrates regardless of the speaker volume setting.
- Off The parent unit will not vibrate at all. 4. Press SELECT to confirm your selection.

Play Iullaby

There are 5 lullabies to choose from. The selected lullaby plays repeatedly.

To play lullaby: Press ►/■ to play lullaby

To stop lullaby:

Press ▶/■ again to stop playing lullaby. To skip to the next lullaby:

Press J to skip to the next lullaby.

ØNOTE

Lullaby playback is paused when the parent unit is talking to the baby unit. Lullaby playback resumes when the parent unit finishes using the TALK feature.

Rename the baby unit

You can rename the baby unit. Once the baby unit is renamed, its new name will appear in the sub-menu of below options:

- Sensitivity
- Temperature
- Rename
- Pair/unpair 1. Press **MENU** when the parent unit is not in
- 2. Press ▼ or ▲ to choose **RENAME**, then
- 3. Press **SELECT** to select the baby unit.
- 4. Press ▼ or ▲ to choose the desired name for
- the baby unit, then press **SELECT** to confirm your selection.

Night vision

The baby unit has infrared LEDs that allow you to see your baby clearly at night or in a dark room. When the baby unit detects low light levels, the infrared LEDs are switched on automatically.

When the infrared LEDs are on, the image is in black and white. This is normal due to external light sources.

C>TIP

Depending on the surroundings and other interfering factors, like lightings, objects, colours and backgrounds, the display resolution may vary. Adjust the baby unit's angle or place the baby unit at a higher level to prevent glare and blurry display

eneral product care

• Avoid dropping the product or treating it roughly.

in water and do not clean them under the tap.

• DO NOT use cleaning spray or liquid cleaners.

before you connect them to the mains again.

Make sure the baby unit and parent unit are dry

When you are not going to use the baby monitor for

some time, remove the rechargeable battery from the

parent unit. Store the parent unit, the baby unit and the

• DO NOT immerse the parent unit and the baby unit

follow these guidelines

or fluorescent lamps).

· Clean with a soft cloth

Storage

adaptors in a cool and dry place.

If you have difficulty with your baby monitor, please try To keep this product working well and looking good,

the suggestions below Avoid putting it near heating appliances and devices Why does the rv the following: that generate electrical noise (for example, motors baby monitor Disconnect the power to the baby unit and the parent unit. not respond • DO NOT expose it to direct sunlight or moisture. normally?

Frequently asked questions

- Remove the battery in the paren unit. Then install the battery 3. Wait a few minutes before connecting power back to the
- baby unit and the parent unit. Turn the baby unit on and the parent unit.
- 5. Wait for the parent unit to synchronise with the baby unit.
- Allow up to one minute for this to take place.

The rechargeable battery of the Why don't he power-on parent unit could be empty and light of the the parent unit is not connected baby unit and to the mains. Insert the appliance parent unit olug into the parent unit and put go on when I the adaptor in a wall socket. Then press to switch on the parent unit switch on the and to establish connection with the units? The baby unit may not be

the baby unit to the mains. Then set ON/OFF switch to ON to switch the baby unit on and to establish onnection with the parent unit. Why doesn't You may have used the battery for my parent unit a long time. Replace a new battery. charge while connected to AC power? The screen is in black and white Why is my

during the nighttime or in a dark

room. This is normal due to externa

connected to the mains. Connect

white? light sources. Why do I get During nighttime or in a dark room, the surroundings and other glare or blurry interfering factors, like lightings, display on my screen when objects, colours and backgrounds may affect the image quality on riewing my baby at night? your parent unit screen. Adjust the paby unit's angle or place the baby unit at a higher level to prevent lare and blurry display

screen in

black and

and the baby unit are at least roduce a metre / 3 feet away from each nigh-pitched The **ON/OFF** he baby unit isn't paired with the light on the arent unit aby unit

Why does the

Why does the

parent unit

Whv does

he parent

quickly to

init react too

other sounds?

Make sure both parent unit and flashes and aby unit are on before pairing. he parent ur . Press **MENU** when the parent unit is not in use

Press ▼ or ▲ to choose PAIR/UNPAIR CAM, then press

The units may be too close to each

ther. Make sure the parent unit

- Press ▼ or ▲ to choose Pair CAM, then press SELECT.
- Press ▼ or ▲ to choose an empty baby unit slot, then press SELECT. The parent unit screen displays Press and hold the pair button at the CAM for $\dot{5}$ seconds until the powe indicator flashes..

Immediately press and hold

unit. The LED light flashes

When pairing is successful, the

screen displays the view of the

If pairing fails, the screen

pairing process again.

baby unit (but not less than

metre / 3 feet).

12 hours.

light on the new baby unit remains

displays **Pairing failed**. Try the

The baby unit may be out of range

Move the parent unit closer to the

If the parent unit is powered by the

provided battery, it may not have

perform normally. Charge the

The temperature of your baby's

oom may be too high or too low.

The baby unit also picks up other

sounds than those of your baby.

ower level or adjust the speaker

Adjust the sensitivity level to a

volume on the parent unit.

enough charge for the parent unit to

pattery in the parent unit for up to

PAIR on the bottom of the bab

product. newly paired baby unit. The LED Adult setup is required

Why don't I

Why can't I

hear my baby

- This product is intended as an aid. It is not a substitute for responsible and proper adult supervision and should not be used as such.
- Do not use this product near water. For example,
- sink, laundry tub or swimming pool, or in a wet basement or shower **CAUTION:** Use only the batteries indicated in
- this manual. There may be a risk of explosion if a wrong type of battery is used for the parent unit. Use only the supplied rechargeable battery.
- damage the product. Baby unit power adaptor: Input 100-240V AC 50/60 Hz; output: 6V DC 1000mA Parent unit power adaptor: Input 100-120V AC 50/60 Hz; output: 5V DC 1000mA. For pluggable equipment, the socket-outlet shall be installed near the equipment and shall be easily
- The power adaptors are intended to be correctly oriented in a vertical or floor mount position. The prongs are not designed to hold the plug in place if it is plugged into a ceiling, under-the-table or

- 9. Unplug this product from the wall outlet before cleaning. Do not use liquid or aerosol cleaners. Use a damp cloth for cleaning
- 10. Unplug the power cords before replacing batteries. 11. Do not cut off the power adaptors to replace them with other plugs, as this causes a hazardous situation.
- 12. Do not allow anything to rest on the power cords. Do not install this product where the cords may be walked on or crimped 13. This product should be operated only from the type
- of power source indicated on the marking label. If you are not sure of the type of power supply in your home, consult your dealer or local power company.
- 14. Do not overload wall outlets or use an extension 15. Do not place this product on an unstable table,
- shelf, stand or other unstable surfaces. 16. This product should not be placed in any area where proper ventilation is not provided. Slots and openings in the back or bottom of this product are provided for ventilation. To protect them from overheating, these openings must not be blocked by placing the product on a soft surface such as a bed, sofa or rug. This product should never be
- 17. Never push objects of any kind into this product through the slots because they may touch dangerous voltage points or create a short circuit. er spill liquid of any kind on the produc

placed near or over a radiator or heat register.

- 18. To reduce the risk of electric shock, do not disassemble this product, but take it to an authorised service facility. Opening or removing parts of the product other than specified access doors may expose you to dangerous voltages or other risks. Incorrect reassembling can cause electric shock when the product is subsequently
- 19. You should test the sound reception every time you turn the units on or move one of the
- 20. Periodically examine all components for damage. 21. Be aware of possible loss of privacy whilst using public airwaves. Conversations may be picked up by other nursery monitors, cordless phones, scanners, etc.
- 22. Children should be supervised to ensure that they do not play with the product.
- 23. The product is not intended for use by persons (including children) with reduced physical, sensory or mental capabilities, or lack of experience and knowledge, unless they have been given supervision or instruction concerning use of the appliance by a person responsible for their safety.

Cautions

- . Use and store the product at a temperature between 0°C and 40°C.
- Do not expose the product to extreme cold, heat or direct sunlight. Do not put the product close to a heating source
- Batteries should not be exposed to excessive heat such as bright sunshine or fire.
- Make sure the baby unit and the adaptor cord(s) are always out of reach of the baby, at least 3 feet away from the baby or cot, to avoid a possible strangulation hazard.
- Never place the baby unit inside the baby's cot or playpen. Never cover the baby unit or parent unit with anything such as a towel or a blanket.
- Other electronic products may cause interference with your baby monitor. Try installing your baby monitor as far away from these electronic devices as possible wireless routers, radios, mobile telephones, intercoms, room monitors, televisions, personal computers, kitchen appliances and cordless

Customer service and oroduct warranty

IMPORTANT Please retain this booklet with your sales receipt as proof of the date of purchase.

Please call our Consumer Services Department on 01235 546810 (from UK) or +44 1235 546810 (outside UK) and a service representative will be



happy to help you.

PRODUCT WARRANTY

Thank you for choosing this quality product from VTech. We hope it will bring many hours of entertainment, imaginative play and learning.

- . The product detailed above is covered by a one year warranty from the date of purchase, against any defects in materials or workmanship The product may be returned to the place of purchase. Alternatively the product can be returned to VTech Electronics Europe plc (see addreselow), with proof of purchase, without proof of purchase no replacement.
- i. This warranty is personal to the original purchaser and is not transfera Breakages to the LCD screen are not covered by the warran
- 7. Returns to VTech Electronics Europe plc should include a cheque or post order for £1.50 towards the cost of return postage and packagin Products returned to VTech Electronics Europe plc, should be address as follows and packed carefully to avoid damage in transit (Please do I clude batteries or adaptor). lease include details of the fault together with your name and address. /Tech Electronics Europe plc, c/o Tablogix Limited, 200 Milton Park, Abingdor Oxon OX14 4TA

THIS WARRANTY IS OFFERED AS AN EXTRA BENEFIT AND DOES NOT AFFECT CONSUMERS' STATUTORY RIGHTS.

Technical specifications

Frequency control	Crystal controlled PLL synthesizer
Transmit frequency	Baby unit: 2406 - 2475 MHz Parent unit: 2406 -2475 MHz
Channels	24
LCD	4.3" Colour LCD (WQVGA 480x272 pixel)
Nominal	Maximum power allowed by FCC

Power

effective range and IC. Actual operating range may vary according to environmental conditions at the time of use. Use only power adaptor listed below:

requirements Baby unit: Ten Pao International Ltd.

Model: S006MV0600100, Input 100-240V AC 50/60Hz 300mA, Output 6VDC 1000mA (EU plug). Model: S006MB0600100, Input

100-240V AC 50/60Hz 300mA, Output 6VDC 1000mA (UK plug) Parent unit:

Model: S006MV0500100, Input 100-240V AC 50/60Hz 300mA, Output 5VDC 1000mA (EU plug) Model: S006MB0500100, Input 100-240V AC 50/60Hz 300mA. Output 5VDC 1000mA (UK plug).

BYD Lithium Battery Company

Model: BT198555/BT298555, 3.7V,

950mAh, Lithium Polymer

Use only the rechargeable battery

CAUTION: Risk of explosion if battery is replaced by incorrect type disposed of used batteries according to the instruction.


Disposal of batteries and oroduct



on products and batteries, or on their respective packaging, indicates they must not be disposed of in domestic waste as they contain substances that can be damaging to the environment and human health.



The solid bar indicates that the product was placed on the market after 13th



The crossed-out wheelie bin symbols



The chemical symbols Hg, Cd or Pb, where marked, indicate that the battery contains more than the specified value of mercury (Hg), cadmium (Cd) or lead (Pn) set out in Battery Directive (2006/66/EC).



August, 2005. Help protect the environment by disposing of your product or batteries

For more information, please visit: www.recvcle-more.co.uk www.recyclenow.com.

When using your equipment, basic safety precautions

electric shock and injury, including the following: Follow all warnings and instructions marked on the

- 4. This product is not intended for use as a medical
- do not use it next to a bath tub, wash bowl, kitchen
- Use only the adaptors included with this product Incorrect adaptor polarity or voltage can seriously
- cabinet outlet.

And your life. VTech Telecommunications Ltd.

A member of THE VTECH GROUP OF COMPANIES Distributed in the U.K. by VTech Electronics Europe plc. VTech is the registered trademark of VTech Holdings Limited. Specifications are subject to change without notice. © 2015 for VTech Telecommunications Ltd. All rights reserved. 05/15. VM343_UK_CIB_V1.0

sound sensitivity of the baby unit to change the setting. Why can't I The baby unit may be out of range. Move the parent unit closer to the establish a baby unit (but not less than connection? 1 metre / 3 feet). Why is the connection Other electronic products may lost every nov cause interference with your baby and then? monitor. Try installing your baby monitor as far away from these electronic devices as possible. interruptions?

The parent unit speaker volume

You may have set a low sound

sensitivity level. See Adjust the

to increase the volume.

may be too low or off. Press VOL+

Important safety instructions

should always be followed to reduce the risk of fire,

- accessible.

Designed to fit your home.

SAVE THESE INSTRUCTIONS